

AG-CRETE INDUSTRIES

RURAL & CIVIL PRODUCTS 2026



Lower maintenance, waste & costs with **AG-CRETE** products!

ROUND TROUGHS – 400MM HIGH

Product Code	Capacity (Litres)	Dimensions (mm) Diameter & Inlet #	Weight (Kg)
AG55	55	600 (2') inlet=1"	140
AG270	270	1150 (3'9") inlet=1"	360
AG415	415	1335 (4'4") inlet=1"	360
AG900	900	1940 (6'4") inlet=1"	730
AG1350	1350	2445 (8') inlet=1½"	1180
FCRT-LS	Optional Hinged Float Cover		50



Float Valve Covers pivot on base
Lift weight only 10-20kg



LOW SIDE FOR SHEEP, GOATS, ALPACAS

ROUND TROUGHS – 600MM HIGH

Product Code	Capacity (Litres)	Dimensions (mm) Diameter & Inlet #	Weight (Kg)
AG100	100	600 (2') inlet=1"	170
AG430	430	1150 (3'9") inlet=1"	400
AG660	660	1335 (4'4") inlet=1"	510
AG800	800	1500 (5') inlet=1"	650
AG1400	1400	1940 (6'4") inlet=1"	940
AG2200	2200	2445 (8') inlet=1½"	1400
FCRT-HS	Optional Hinged Float Cover		90



HIGH SIDE FOR CATTLE, HORSES



RECTANGULAR TROUGHS FOR ALL LIVESTOCK

Product Code	Capacity (Litres)	Dimensions (mm) Length x Width x Height #	Weight (Kg)
LT1200W	130	1160 (3'10") x 575 x 400 inlet=1"	330
LT3000	485	3000 (10') x 685 x 400 inlet=1"	830
LT4300	716	4300 (14') x 685 x 400 inlet=1½"	1040
LT4300i50	716	4300 (14') x 685 x 400 inlet=2"	1040
LT4800	980	4800 (16') x 725 x 480 inlet=2"	1500

FEEDLOT WATER TROUGHS FOR BEEF & DAIRY CATTLE

LT3000F-270	270	3000 (10') x 600 x 675 inlet=1¼"	1100
LT3000F-485	485	3000 (10') x 700 x 700 inlet=1¼"	1280
LT4800F-980	980	4800 (16') x 735 x 700 inlet=1¼"	2250

700mm high troughs have a hollow base for enclosed plumbing



Plumbing
access doors
at both ends



BIG 100mm QUICK-DRAIN OUTLETS
Coarse thread & a sediment channel,
so grit washes out & plugs don't jam.
(Brass drains available to order.)

130Lt trough ➔
includes float valve



INCLUDED on rectangle troughs:
Unique hinged float covers.
Stock-proof = No worries!
(Pivoting lift weight only 15-20kg)



FEED TROUGHS Save \$\$! Allow 0.7m of side per cow

Product Code	Style	Dimensions (mm) Length x Width x Height	Weight (Kg)
FT4000	Small	4000 x 685 x 400	900
FT4000HI-LO	High/Low	4000 x 700 x 500-900	1850
FT3000	Standard	3000 x 1000 x 550	1300
FT3000-OL	High/Low	3000 x 1000 x 550-200	1170
FT3000W	Extra Wide	3000 x 1500 x 550	1650



Best design!
vertical sides
& rounded
inner corners

Water troughs available with inlets up to 2" BSP. *Float valves are optional extras. Freight rates are very reasonable – please ask!

✓ No sharp corners ✓ Easy to clean ✓ Solid brass pipe connections

GRAIN BUNKER WALLS & ACCESSORIES

Product Code	Item	Dimensions (mm) Height x Length x Width	Weight (Kg)
BW	Bunker Wall	1000 x 3000 x 550	1170
BW-XL	Bunker Wall Large	1300 x 3000 x 800	1950
BW-CLAMP	Clamp Set (2-3/wall)	1 x Galv F-clamp, bolt, washers, wing nut	2.65
BW-RHS295	RHS Rail c/w plugs	50x50x2950mm (2mm BMT Galv)	8.78



ECONOMICAL BULK STORAGE

- ✓ **Durable:** Precast walls are long-lasting and remain a saleable asset.
- ✓ **Portable:** Cast-in lifting pins enable easy moving & positioning.
- ✓ **No inside leg** means forming ends/corners is simple, with no gaps.
- ✓ **Rounded top edges** and lip keeps liners & covers secure & tight.



ASK US
for our Bunker
Capacity
Calculator

SMALL BARRIERS

Code	Dimensions (mm) Height x Length x Width	Weight (Kg)
DW0750	750 x 3000 x 275mm	660
DW0900	900 x 6000 x 300mm	1760



← Fasten down onto
a slab or footing

HEAVY DUTY RETAINING WALLS

Code	Height x Length x Width	(Kg)
Divider Walls with fork pockets (except DW6000)		
DW2400	2400 x 1200 x 1200	1900
DW2500	2500 x 1200 x 1200	2180
DW3000	3000 x 1200 x 1200	2300
DW3000HD	3000 x 1200 x 1350	3200
DW4000	4000 x 1200 x 1350	3350
DW6000	6000 x 2000 x 3000	11500

Shape allows
free flow of
product off the
base →




- ✓ **ENGINEERED**
- ✓ **Heavily Reinforced**
- ✓ **Ideal for bulk storage of:**

- Grain
- Silage & Feed
- Fertiliser
- Sand, Soil & Gravel
- Woodchips


L-Block Retaining Walls

LB1200	1200 x 2400 x 1000	1800
LB1500	1500 x 2400 x 1000	2020
LB1800	1800 x 2400 x 1000	2200
LB2000	2000 x 2400 x 1000	2350
LB2400LD	2400 x 2400 x 1000	2590
LB3000	3000 x 2400 x 1750	5030
LB4000LD	4000 x 2400 x 2000	6000
LB4000HD	4000 x 2400 x 2200	6210
RAMP1200	1200 x 4800 x 3000	6000



SWIFT LIFT PINS = EASY PLACEMENT

- ✓ **Integrate in new walls**
- ✓ **Repurpose existing sheds**
- ✓ **L-Blocks = earth retaining**
- ✓ **Loading Ramp construction**

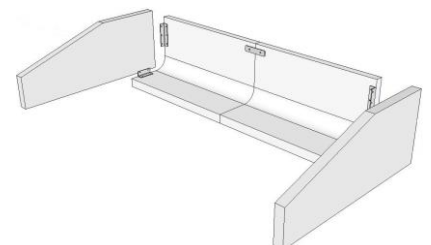

Connecting Plates & Bolts supplied when required →



Freight rates are very reasonable – please ask!

✓ **Customisable** ✓ **Fast Installation** ✓ **Deliveries VIC, NSW, SA**

DRIVEABLE HEADWALLS

VicRoads pattern driveable headwalls.
Available to suit 250mm, 300mm & 375mm pipes.

WING WALLS

VicRoads pattern & other wing wall types.
Available to suit 250mm to 375mm pipes.

DRAINAGE OR ELECTRICAL PITS & RISERS

- Custom made up to 1900mm deep in one piece.
- Available with a flat top to suit a standard concrete cover, or a recessed top edge to house a grate or lid.
- Custom located pipe voids (any size, including angled) or standard knockouts.
- Can be engineered to Class D.

Product Code	Dimensions (internal) Length x Width x Depth	Weight (Kg)	+100mm Pit Depth or Riser
DP450	450 x 450 x 600mm	365	+54kg
DP600	600 x 600 x 600mm	490	+70kg
DP750	750 x 750 x 750mm	845	+84kg
DP900	900 x 900 x 900mm	1175	+100kg
DP1000	1000 x 1000 x 1000mm	1430	+108kg
DP1200	1200 x 1200 x 1200mm	2000	+128kg
DP1400	1400 x 1400 x 1400mm	2650	+150kg
DP900x600	900 x 600 x 900mm	965	+84kg
DP1000x750	1000 x 750 x 1000mm	1230	+96kg
DP1050x900	1050 x 900 x 1050mm	1440	+106kg

PIT COVERS & GRATES

These provide a maintenance entry point and a secure cover for pits up to 1400mm x 1400mm. Pit covers come complete with a lid. Also available are curved edge covers to suit gutters for side-entry stormwater pits.

VALVE BOX / PUMP COVER

900mm² x 900 high internal dimensions (550kg)
Fits on a standard pallet. Complete with galvanised lockable cover.

PARKING STOPS / KERBING

150mm wide x 150mm high x 2010mm long (90kg).
These can be pinned down for permanent use.

SMALL PRECAST SLABS & BLOCKS

Reinforced 40mpa concrete.
Round 700mm Ø x 40mm thick (40kg): For hot water services & gas bottles.
Square 600x600x40mm (40kg): For lamb steps around troughs or pathways.
Rectangle 900x600x40mm (60kg): Suit air-conditioner outdoor units.

In-ground leg is a requirement for
VicRoads
installations →

← **Driveable Headwalls**

T-Headwall ↓

Premium Wingwall →

*Request
a quote for
your exact
requirements*

SWIFT LIFT PINS = EASY PLACEMENT

AG-CRETE INDUSTRIES

T (03) 5450 4400 E sales@agcrete.com.au
F (03) 5450 3119 2 Mibus St, Kerang Vic 3579

Available From:

June-2026